

10 9 8 7 6 5 4 3 2 1

F







E

D

C

B

A

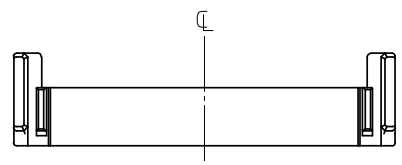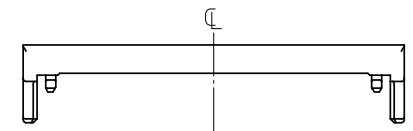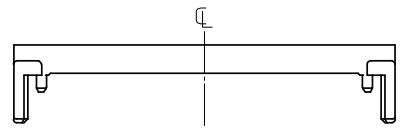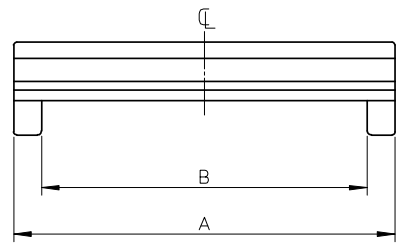

注記  
NOTES

- 1.適合プラグジャケット: 501783-\*\*09  
APPLICABLE PLUG JACKET : 501783-\*\*09
- 2.材質  
MATERIAL  
PBT, UL94V-0, 色: 黒色  
PBT, UL94V-0, COLOR: BLACK
- 3.ELV及びRoHS適合品  
ELV AND RoHS COMPLIANT

RELEASED EC NO.: J2008-2552 DRWN: KSETO 2007/12/25 CHKD: KMORIKAWA 2007/12/25 APPR: KMORIKAWA 2007/12/26	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER	±0.2	DRAWN BY H. IJIMA	DATE 07/12/25	TITLE 0.5 FFC TO BOARD CONN PLUG JACKET COVER			
	10 OVER 30 UNDER	±0.25	CHECKED BY K. MORIKAWA	DATE 07/12/25				
	30 OVER	±0.3	APPROVED BY H. HIRATA	DATE 07/12/25	MOLEX INCORPORATED			
ANGULAR ±1 °		MATERIAL NO. 501784-**08		DOCUMENT NO. SD-501784-005				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

16.2	18.96	501784-3008	30
B	A	MATERIAL NO.	CKTS.