


**UNCONTROLLED DOCUMENT**



IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	65 Ω	170 Ω	375 Ω
Minimum	- Ω	136 Ω	- Ω

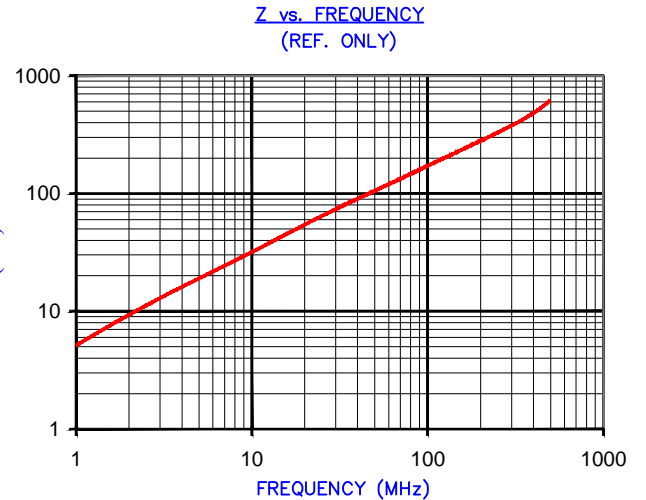


FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	63.50 [2.500]	± 1.27 [.050]
B	52.07 [2.050]	± 1.02 [.040]
C	12.98 [.511]	± 0.38 [.015]
D	12.70 [.500]	± 0.51 [.020]
E	1.68 [.066]	± 0.51 [.020]

WEIGHT/1000 45.72 kgs [100.80 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

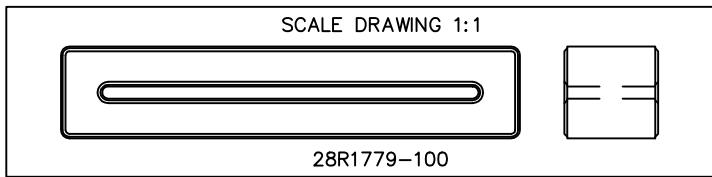

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		<b>Laird</b>	
L	UPDATE COMPANY LOGO	01/02/13	QIU	PROJECT/PART NUMBER:		REV	DRAWN BY:
K	UPDATE MIN Z SPECS & COMPANY LOGO	07/27/07	TMB	28R1779-100		L	LNK
J	UPDATE MIN Z SPEC ADD TEST REF#	11/18/04	JRK	DATE:	02/24/93	SCALE:	1.5 : 1
H	CHANGE PRINT FORMAT CHANGE Z SPECS REMOVE NOTE 1	05/19/03	TMB	CAD #	28R1779-100-L	TOOL #	R1779
G	CHANGE Kgs FROM 101.20 Kgs TO 45.72 Kgs	09/24/02	TMB	MATERIAL:		FERRITE	
REV	DESCRIPTION	DATE	INT				