
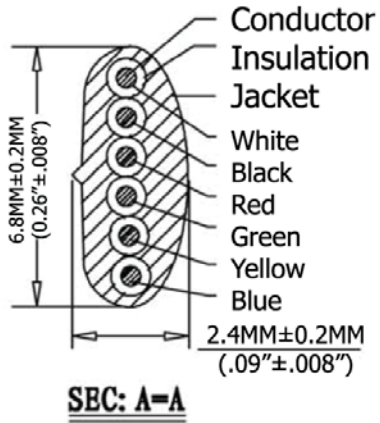


1          2          3          4          5          6          7

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

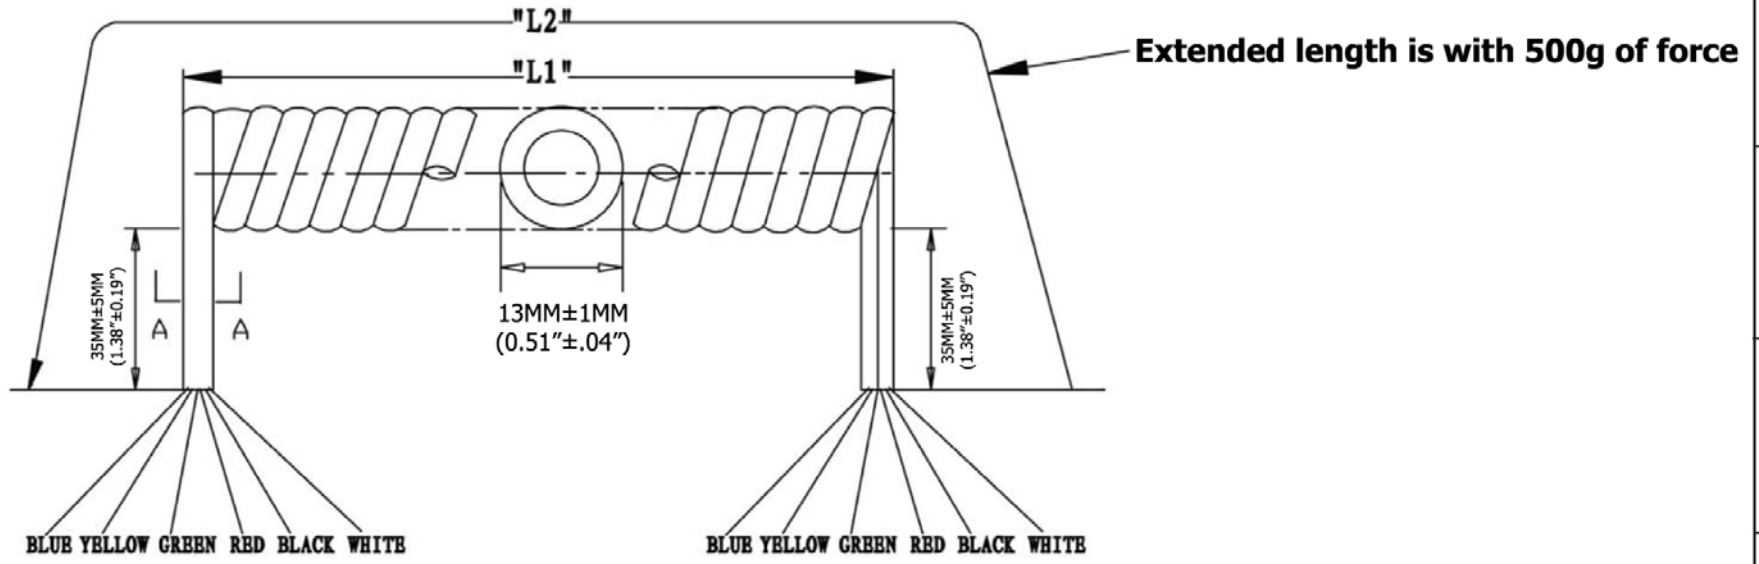

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	21.5 Inches
1,524.0MM-1,752.6MM	546.1MM

- Material:**
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
  - Insulation(X6C):PP6331 ID 0.95-1.0
  - Jacket: PVC NO UL 80P
  - Package: Individual PE Bag

Scale	1:1					Name
TOLERANCE					Drawn	12.19.11
X.X	±0.40				Approved	Chappell
X.XX	±0.25					
X.XXX	±0.15					
Angle	±3°					
		Modification	Date	Name		

Item No.	<b>AT-K-C-26-6-W/5</b>	
Title	NON-UL 26AWG (0.16/7)*6C, O.D.: 2.4*4.8MM, Pre-Cut, 5Ft., White	
Drawing No.		<b>rev00</b>
Replace		Sheet



1          2          3          4          5          6          7