

## SUMMARY

### # Wires

Low	65
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	1R
Termination type	Female crimp
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	FGG.1R.365.GLC92
Status	
Alternative part	



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	EBG*: Fixed receptacle, key (G) or key (A) with visible shell
Keying	
Housing Material	Crastin® PBT, gray
Cable Fixing	∅ 0 - 0 mm
Variant	

### Performance

Configuration	1R.365 : 65 low voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	0.5 Amps

### Specifications

Contact Type: Crimp
Test voltage (kV rms) Contact-contact: 0.6


### Others

IP Rating: 50
---------------

---

# DRAWINGS

## Draws

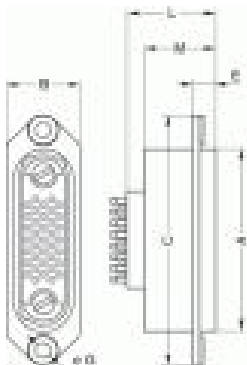

## Dimensions

	A	B	L	M
mm.	24.5	9	30.5	23.5
in.	0,96	0,35	1,20	0,93

---

# RECOMMENDED BY LEMO

## Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 28-30-32/4-3-3

Positionner: DCE.91.050.BVM

Extractor: DCF.91.050.2LT

Replacement contact: EGG.00.654.ZZM

## Cables