


CONDUCTOR CONSTRUCTION (N/mm) :
41/0.16AS

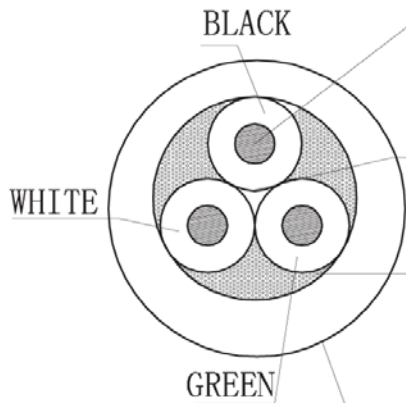

PVC INSULATION AVERAGE THICKNESS: 0.38mm
ID: 2.10±0.1mm

Fill
PVC JACKET AVERAGE THICKNESS: 0.76mm
OD: 6.50±0.15mm

Material:

- E243711(UL) SVT 3 x 18AWG(0.824MM²) VW-1, 60°C 300V - CSA 228191 SVT 3 x 18AWG(0.824MM²) FT2 60°C 300V -LF-
- Jacket Color: Black
- E - Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1						Name	Item No.
TOLERANCE						Drawn	12.27.11	AK500-RA-6-1
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								Title
								Power Cord - SVT Right Angle/Open End, Unshielded, 60°C, 18AWG, 1 Meter
								Drawing No.
								rev00
								Replace
								Sheet



Modification Date Name