
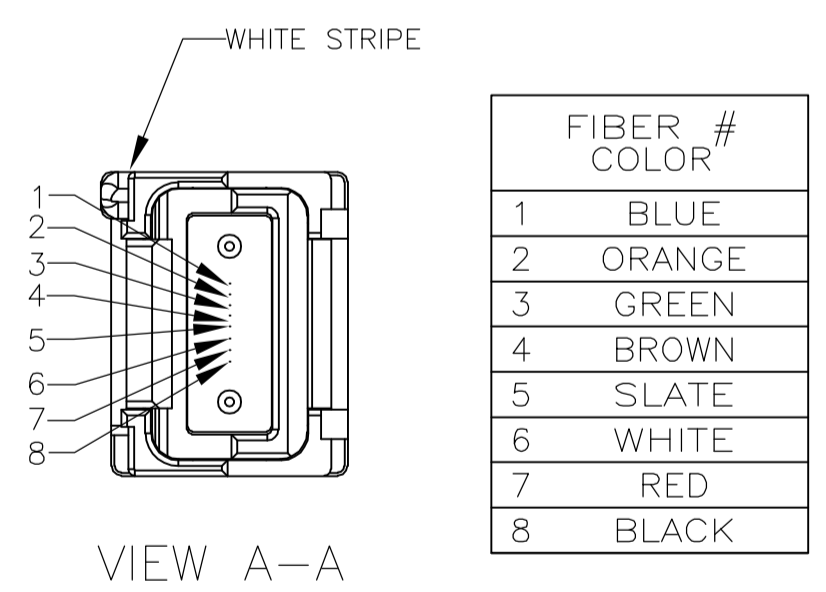


LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		NEW RELEASE	02FEB06	JWD	JD

1. MAXIMUM INSERTION LOSS: 1.0 dB (1310nm)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

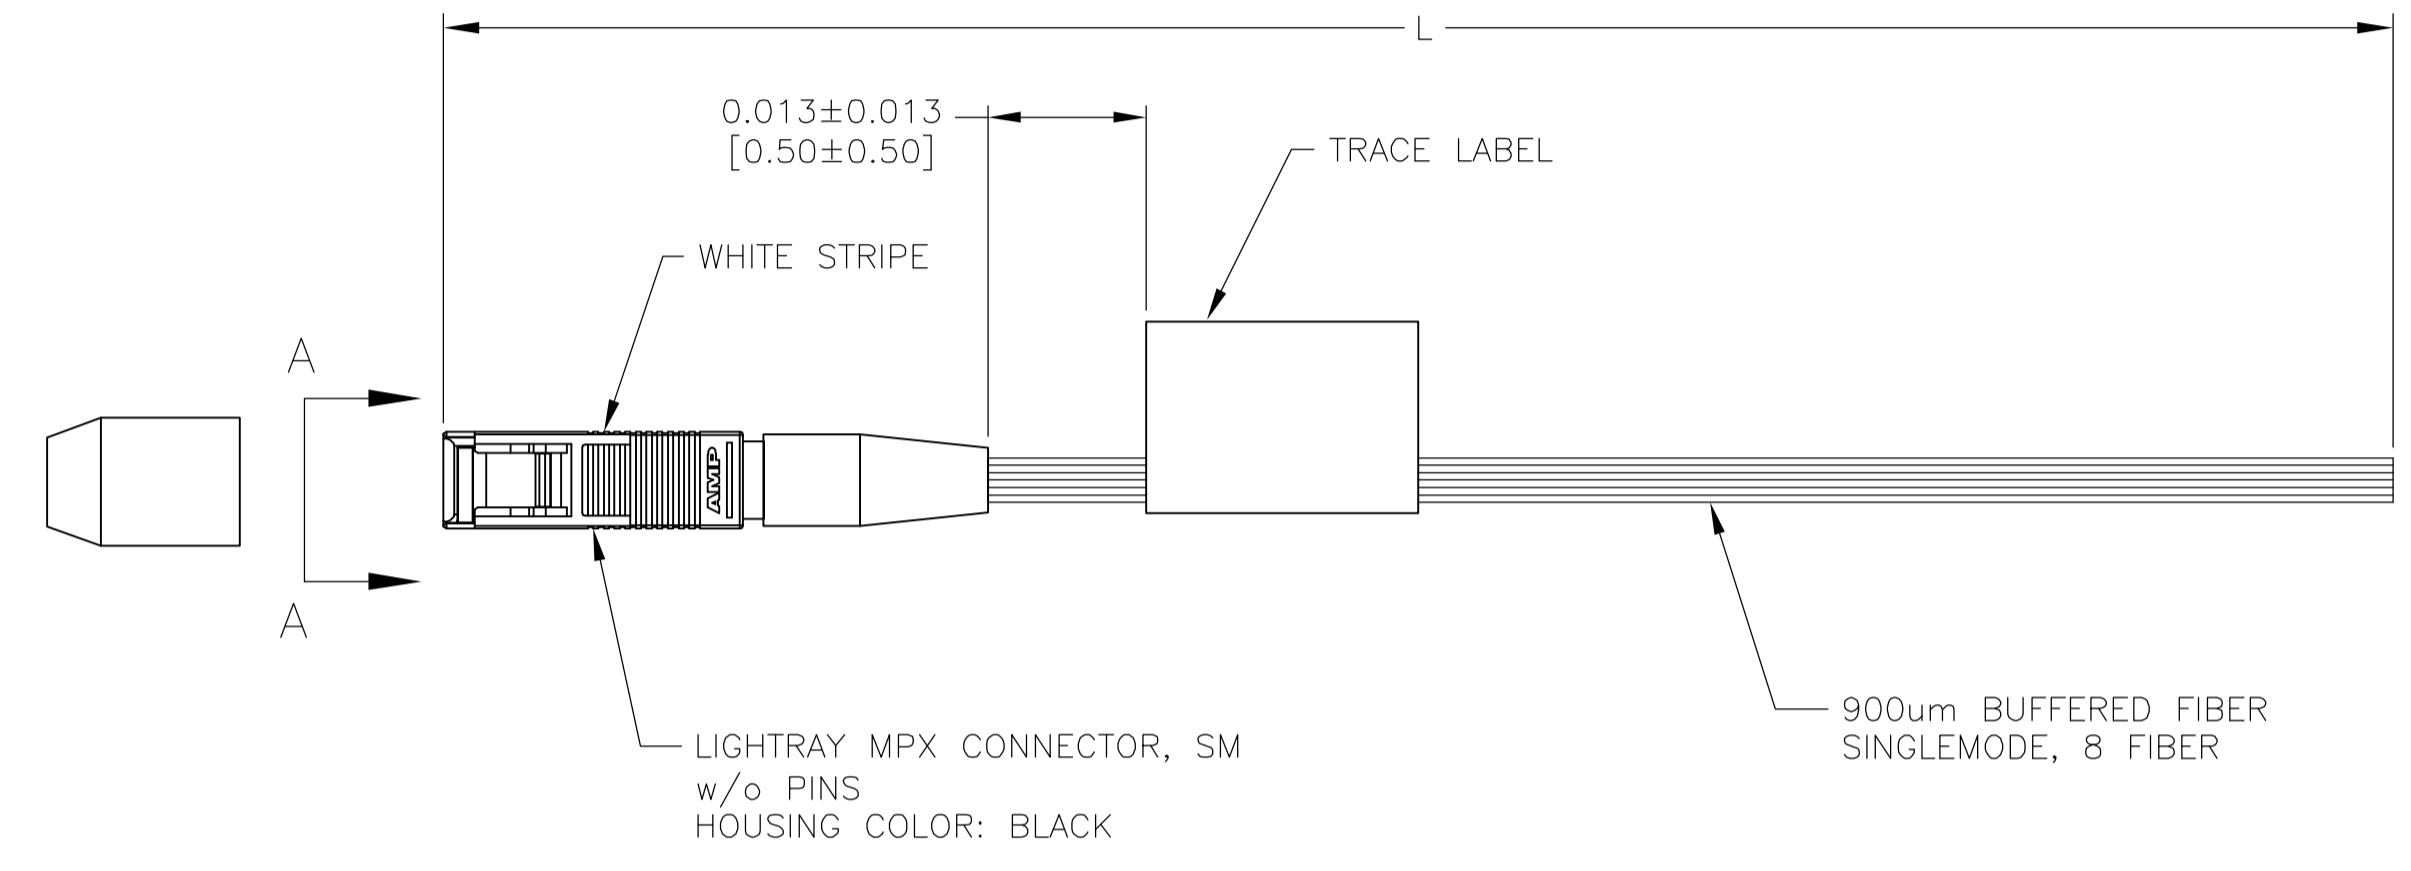

VIEW A-A
 LIGHTRAY MPX CONNECTOR FIBER PATH

0.480±0.030 [18.9±1.2]	6374537-3
2.000±0.051 [78.7±2.0]	6374537-2
1.000±0.051 [39.4±2.0]	6374537-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 02FEB06		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 02FEB06		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL 02FEB06	PRODUCT SPEC		
		APPLICATION SPEC		PIGTAIL, FIBER OPTIC, SINGLEMODE, (8) 900um BUFFERED FIBER CABLE LIGHTRAY MPX, NO PINS	
MATERIAL		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO 6374537
		CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1
				REV A	

6374537