

BROWN  
BLUE  
YELLOW  
GREEN  
RED  
BLACK  
ORANGE  
WHITE


BROWN  
BLUE  
YELLOW  
GREEN  
RED  
BLACK  
ORANGE  
WHITE

"L"

Conductor: [26AWG(0.16/7)Bare Copper]x8C




Insulation: [PP6331 ID:0.95±0.03]x8C

Jacket: PVC NOUL 65P

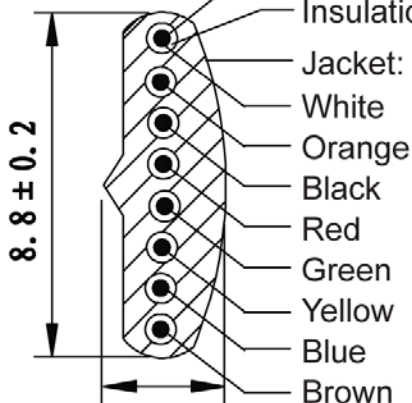

2.4 ± 0.2  
SEC: A=A

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-K-S-26-8-B/7	A	2,135±30(7ft)	Black	2,145-2,155mm
AT-K-S-26-8-B/14	B	4,270±60(14ft)	Black	4,290-4,300mm
AT-K-S-26-8-B/25	C	7,625±100(25ft)	Black	7,650-7,660mm

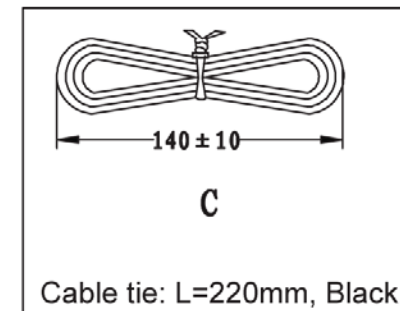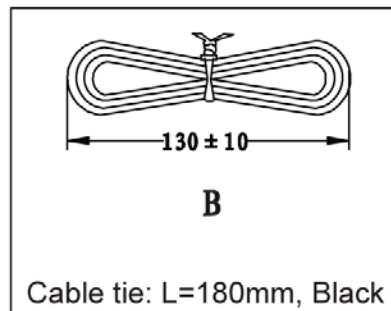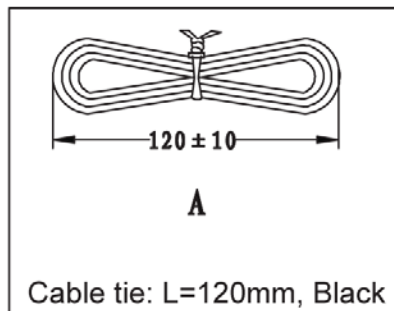

Unit: mm



Scale	Free				Date	Name	Title
TOLERANCE					Drawn	01.07.13	Wilson
X.	±X				Approved	01.07.13	Groll
X.X	±X						
X.XX	±X						
DIM	TOL						
X.°	±X°						
X.X°	±X°						
Angle	TOL	Id.	Modification	Date	Name		
						1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us	

Title  
Modular pre-cut cable - Straight  
8C, 26AWG, Black, 7-25 feet

ASSMANN WSW-No.  
**AT-K-S-26-8-B/xx**

Drawing-No.

Replace

rev00

Sheet  
1/1