


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

5

PART NUMBER	MATERIAL	HEIGHT "A" +/- .031	IMPRINT AREA "B" +/- .031	VERTICAL REPEAT "C" +/- .031	LABELS PER ROW	STANDARD PKG. QTY.
S075X075VATY	GMV16 OR GMV17	0.75 [19.0]	0.25 [6.35]	1.00 [25.4]	5	5000
S075X100VATY		1.00 [25.4]	0.38 [9.53]	1.25 [31.8]		
S075X125VATY		1.25 [31.8]		1.50 [38.1]		
S075X150VATY		1.50 [38.1]	0.50 [12.7]	1.75 [44.45]		

NOTES:
1. MILLIMETERS ARE IN [].

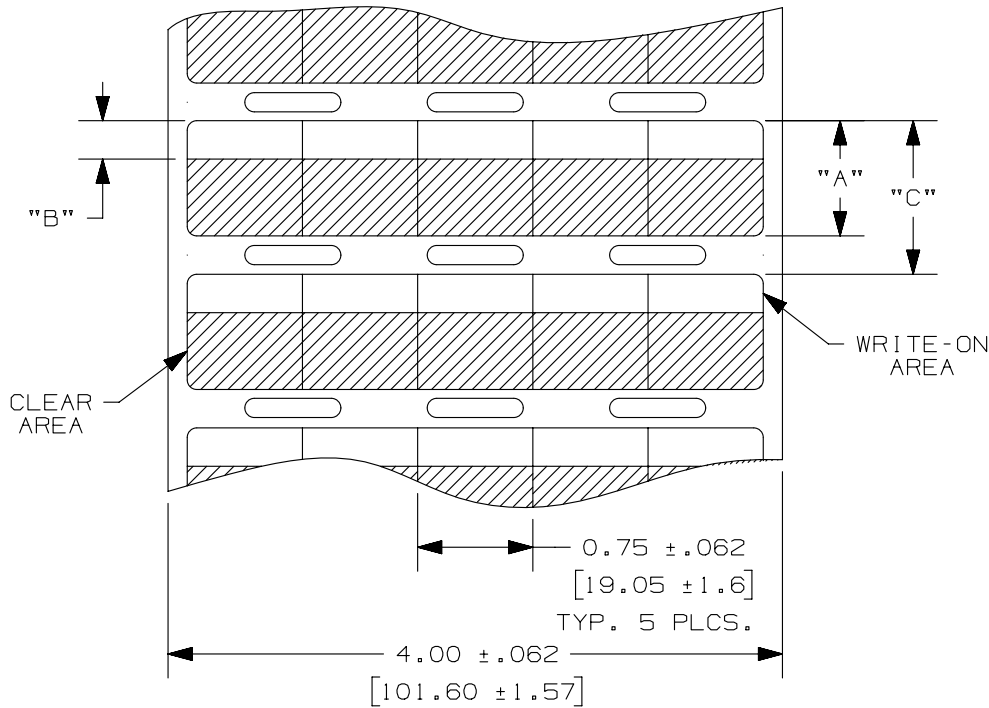

B

B

A

A

TITLE		S075X***VATY OPTIMUM SELF-LAMINATING THERMAL TRANSFER PRINTABLE LABELS CUSTOMER DRAWING		
ITEM REVISION NAME		100472JY/07		
DATASET FILE NAME		100472JY-DC-C10466/07G		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		PANDUIT		
.x ± .12 [3.04] .xxx ± .025 [.635] .xx ± .062 [1.57] ANGLES ±				
MATERIAL:		SEE TABLE		
DRAWING NUMBER:		C10466		
DRAWN BY	DATE	CHK	SCALE	SIZE
RVU	8/31/06	MSAD	NTS	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5	8/26/13	RVU	SEWH	MSAD	REMOVE PN: S075X125TAT.	GAECN01161
4	9/6/11	RVU		MSAD	ADD S075X100VATY ON TABLE.	6503

D10100DA/16