


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECR-08-015371	20JUN08	JWD	JD

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0,2dB PLUS CABLE ATTENUATION OF 1,5dB/Km AT 1300nm(SEE TABLE)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

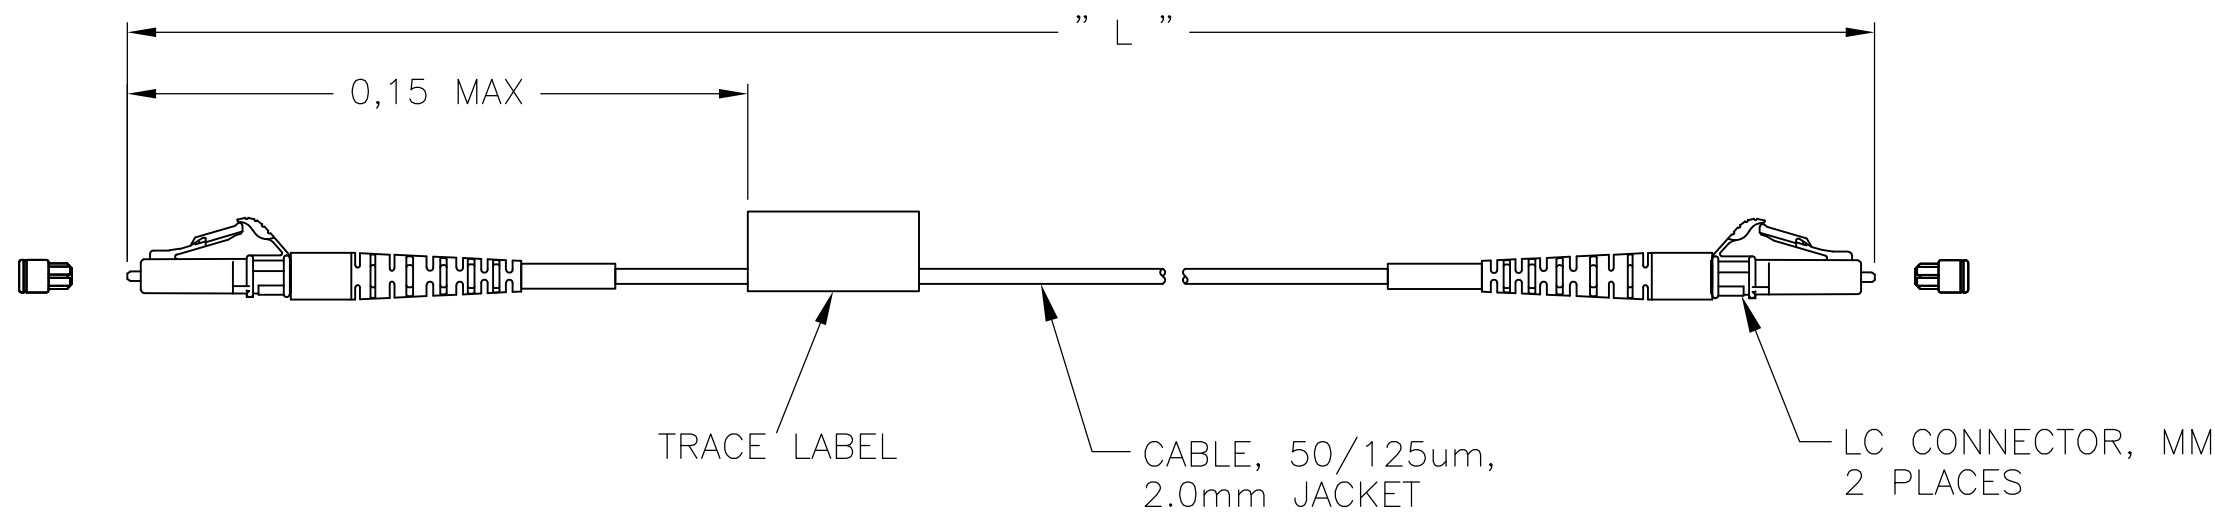

0.20	0.200+0.030/-0.000 [7.87+1.18/-0.00]	8-6374656-0
0.22	10.00±0.15 [393.70±6.00]	1-6374656-0
0.21	5.00±0.08 [196.9±3.1]	6374656-5
0.21	4.00±0.08 [157.5±3.00]	6374656-4
0.20	3.00±0.05 [118.1±2.0]	6374656-3
0.20	2.00±0.05 [78.7±2.0]	6374656-2
0.20	1.00±0.05 [39.4±2.0]	6374656-1
MAX IL(dB) $\Delta$ 1	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 15SEP05	Tyco Electronics Corporation Harrisburg, PA 17105-3608													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 15SEP05	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125um, 2.0mm LC TO LC													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 15SEP05	PRODUCT SPEC -													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -	FINISH -	WEIGHT -	DRAWING NO C-6374656	RESTRICTED TO -												
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1												
			REV B													