


CUSTOMER DRAWING

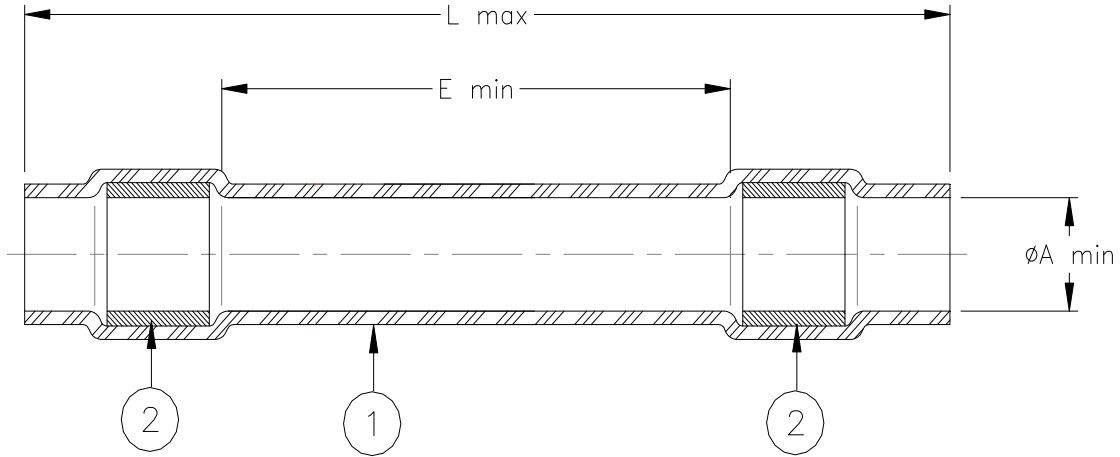

Product Revision		Product Dimensions			Cable Dimensions	
Product Name		L max	E min	ϕA_{min}	ϕD_{min}	ϕD_{max}
D-436-08	L	34.7 (1.365)	7.7 (0.305)	3.8 (0.150)	0.65 (0.250)	3.8 (0.150)
D-436-09	L	34.8 (1.370)	7.7 (0.305)	6.1 (0.240)	1.25 (0.050)	6.1 (0.240)
D-436-10	C	35 (1.380)	7.7 (0.305)	7.9 (0.310)	2.55 (0.100)	7.9 (0.310)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RING: Immersion resistant thermoplastic. Color:gray.

APPLICATION

1. These parts are designed to provide an immersion resistant seal on 1 to 1 splices made of wires having an insulation rated for at least +135°C.
2. Temperature range: -55°C to +150°C. Parts may be installed by convection heating.

Cable dimension:



* A trademark of Raychem Corporation..

		RAYCHEM DEVICES	TITLE: SEALING SLEEVE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-436-08/-10			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REVISED PER ECO: 13-002343		
DRAWN BY: T.NGUYEN	DATE: 02/06/2013	REVISION: B	SCALE: None	SIZE: A	SHEET: 1 of 1	

©2012-2013 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision