

Silicon Standard Recovery Diode

$V_{RRM} = 800\text{ V} - 1600\text{ V}$

$I_F = 75\text{ A}$

Features

- Terminals and the mounting plate are electrically isolated
- Types up to 1600 V V_{RRM}
- Modules can be installed in the same cooling fin as other modules, thus saving installation space
- Diode chips are coated with a glass of zinc oxide, making them highly resistant to temperature and humidity variation
- 6 diode chips are connected to the 3-phase bridge rectifying circuit inside the module; a cost effective feature

Three Phase Package



Applications

- Inverters for AC motors
- Power supply units for DC motors
- DC power supply units for battery cl
- General purpose DC power supply

Maximum ratings, at $T_j = 25\text{ °C}$, unless otherwise specified


Parameter	Symbol	Conditions	M3P75A-80	M3P75A-160	Unit
Repetitive peak reverse voltage	V_{RRM}	$T_j = 25\text{ °C}$, $I_R = 25\text{ }\mu\text{A}$	800	1600	V
Non-repetitive peak reverse voltage	V_{RSM}	$T_j = 25\text{ °C}$, $I_R = 25\text{ }\mu\text{A}$	880	1700	V
Continuous forward current	I_F	$T_C \leq 103\text{ °C}$	75	75	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ °C}$, $t_p = 8.3\text{ ms}$	1000	1000	A
I^2t	I^2t		4400	4400	A ² S
Operating temperature	T_j		-40 to 150	-40 to 150	°C
Storage temperature	T_{stg}		-40 to 125	-40 to 125	°C
Tightening torque			25±2	25±2	kg-cm
Vibration resistance			5	5	G
Dielectric strength			2000 VAC 1 min	2000 VAC 1 min	
Net weight			133	133	g

Electrical characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified


Parameter	Symbol	Conditions	M3P75A-80	M3P75A-160	Unit
Diode forward voltage	V_F	$I_F = 75\text{ A}$, $T_j = 25\text{ °C}$	1.15	1.15	V
Reverse current		$V_R = V_{RRM}$, $T_j = 150\text{ °C}$	10	10	mA

Thermal characteristics

Thermal resistance, junction - case	R_{thJC}		0.25	0.25	°C/W
-------------------------------------	------------	--	------	------	------

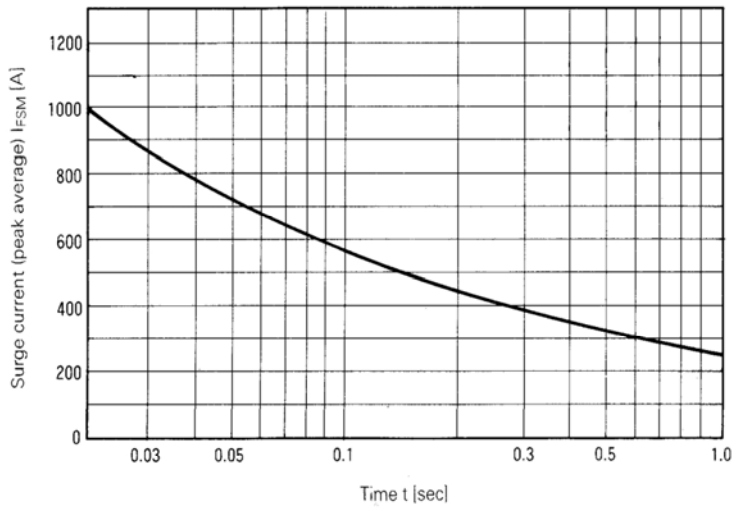

Surge Current

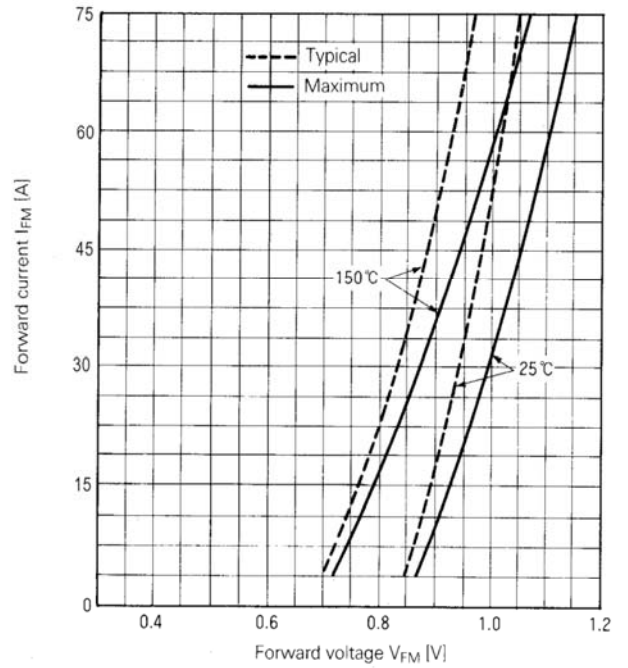

Forward Characteristics

